


## LED PANEL 1200 X 600mm

72W

Fits in suspended ceiling grid. Direct replacement for  
luorescent luminaires. Installs in minutes!

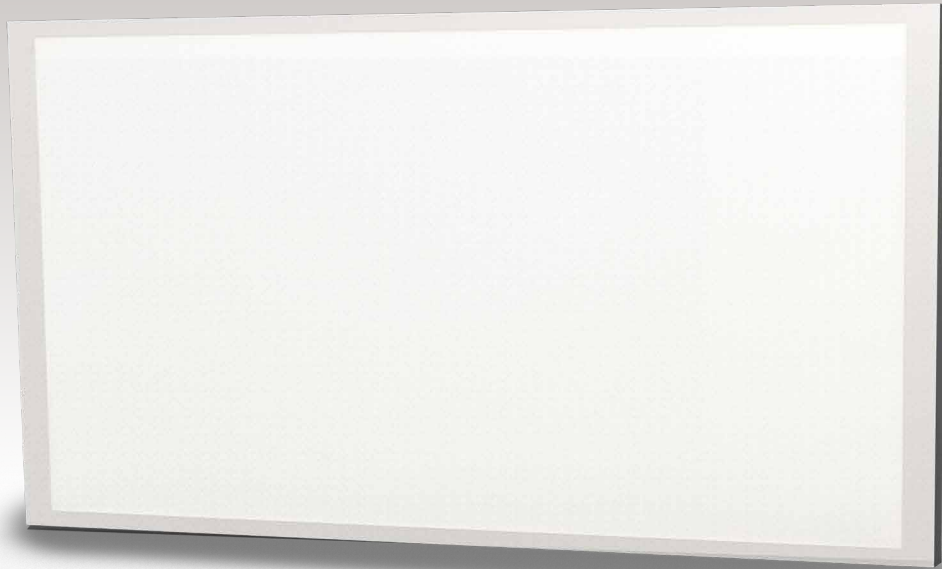

Emergency Version  
Available



### FEATURES:

- Replacement for 1200 x 600mm Modular Fittings
- Excellent colour rendering
- Long lifetime of 30,000 hours
- Slim, modern design
- Save up to 60% on energy costs

### APPLICATIONS



COMMERCIAL



FACTORIES



INDUSTRIAL



WAREHOUSE

**72W**

# LED PANEL

## 1200 X 600mm

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes!

| Part No.               | 223726  | 223733                             | 223740                             |
|------------------------|---|------------------------------------|------------------------------------|
| <b>DESCRIPTION</b>     | LED Panel 72W<br>White Frame 3000K                          | LED Panel 72W<br>White Frame 4000K | LED Panel 72W<br>White Frame 6000K |
| DIMENSIONS             | 1195 x 595 x 33mm   |                                    |                                    |
| POWER FACTOR           | 0.90  |                                    |                                    |
| POWER INPUT            | 72W   |                                    |                                    |
| CURRENT                | 900mA   |                                    |                                    |
| COLOUR TEMPERATURE     | 3000K (Warm White)  | 4000K (Cool White)                 | 6000K (Daylight White)             |
| COLOUR RENDITION (CRI) | Ra>81   |                                    |                                    |
| LUMENS                 | 6200lm  | 6300lm                             | 6400lm                             |
| LIGHT EFFICACY         | 90lm/W  |                                    |                                    |
| IP RATING              | IP20  |                                    |                                    |
| BEAM ANGLE             | 120°  |                                    |                                    |
| CONSTRUCTION           | Aluminium, PS   |                                    |                                    |
| WORKING TEMPERATURES   | -20°C to +40°C  |                                    |                                    |
| ENERGY CONSUMPTION     | 72kWh/1000hrs   |                                    |                                    |
| DRIVER                 | Bright Source   |                                    |                                    |
| CERTIFICATION          | CE, RoHS  |                                    |                                    |
| WARRANTY               | 1year (+2 years extended warranty with online registration) |                                    |                                    |

# BRIGHT SOURCE



Formerly rated A+  
(same quality,  
new energy rating  
label regulations)

