

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only




# Faceta

07072 FAC6IN20-SCT

## Faceta, 6 inch LED commercial DL, 20W/16W CCT/W switch

- IP65 when ceiling recess mounted
- Optional drop-down diffusers for KCDL2622FR65
- Unique faceted white reflector
- Low glare
- Flicker free
- Optional DALI, 1-10V (0-10V) driver (FAC8IN26-SCT)
- Option of CCT switching 3000K, 4000K, 5000K

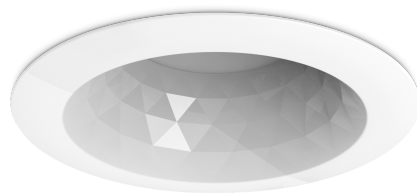

### Overview

The Faceta LED Commercial

Downlight range are retrofit LED

lighting for widely used 3", 4", 6" and

8" fluorescent downlights with a

distinctive faceted white reflector

and a recessed light source.

Available with a switchable CCT and

the downlights are compatible with

Kosnic's emergency module.



IP65



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

### Technical Summary

Product Code	FAC6IN20-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	20 W
Settable Wattages	16W, 20W
Driver Code/Part number	CYC030SNL60-70N (DR25C4759)
Driver Maximum Power (W)	30
Driver Output Current (mA)	600/700
Power Factor	>90
Driver Power Factor	>90
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 5000k
SDCM of CCT	<6
CRI	>80
Dimmable	Specific Dimmer
Lumens Output Maximum	1,380 lm
Maximum Efficiency	69 lm/W
Maintained Luminous Flux	300 lm
Nominal Lifetime (h)	50,000 h
Weight	0.6Kg
Dimensions (L x W x D) (mm)	88xØ202
Cut-Out (mm)	Ø164mm



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Faceta



07072 FAC6IN20-SCT

## Optional Gear

Product Code	Description	Type
UEM03	3W Universal Emergency Module	Emergency Module
UEM03/ST	3W Universal Emergency Module, Self Test	Self-test Emergency Module
EMPAD01/ST	Neka self test 1W universal emergency pad for downlight	Self-test Emergency Module
DRC30/DA	Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver	Dimmable Driver
EMPAD01	Neka, 1W universal emergency pad for downlight	Emergency Module

## Overview

The Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 3", 4", 6" and 8" fluorescent downlights with a distinctive faceted white reflector and a recessed light source.

Available with a switchable CCT and the downlights are compatible with Kosnic's emergency module.

Rated Power (W)	Current (mA)	CCT (K)	Lumen (lm)
16	73	3000	1000
16	73	4000	1100
16	73	5000	1100
20	99	3000	1250
20	99	4000	1380
20	99	5000	1380




**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

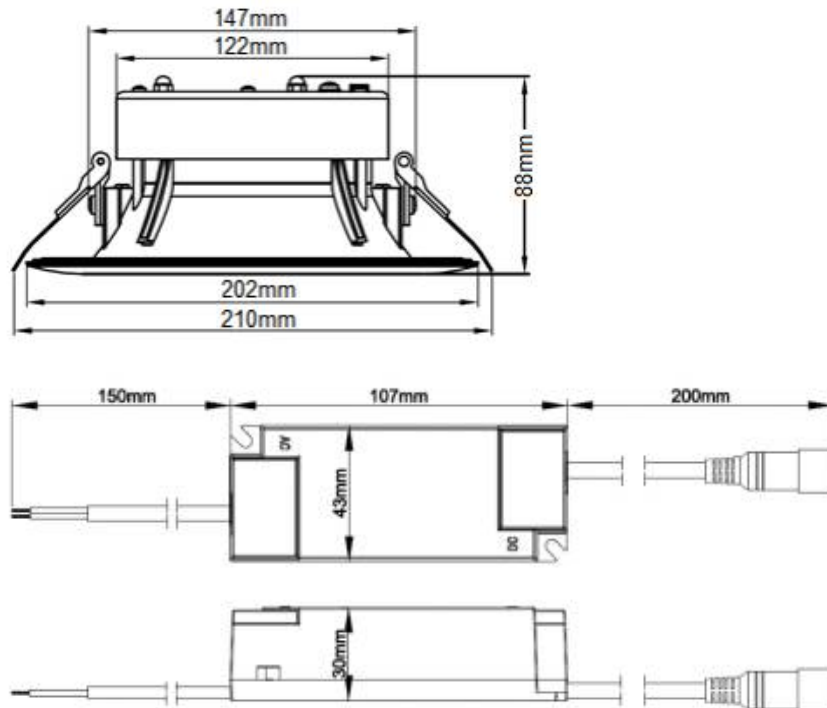

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com