

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only




# Faceta

07073 FAC8IN26-SCT

## Faceta, 8 inch LED commercial DL, 26W/22W CCT/W switch

- IP65 when ceiling recess mounted
- Optional drop-down diffusers for KCDDL2622FR65
- Unique faceted white reflector
- Low glare
- Flicker free
- Optional DALI, 1-10V (0-10V) driver (FAC8IN26-SCT)
- Option of CCT switching 3000K, 4000K, 5000K

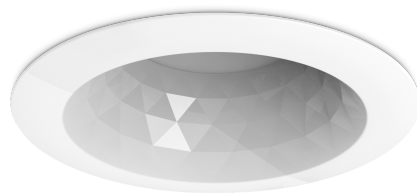

### Overview

The Faceta LED Commercial

Downlight range are retrofit LED

lighting for widely used 3", 4", 6" and

8" fluorescent downlights with a

distinctive faceted white reflector

and a recessed light source.

Available with a switchable CCT and

the downlights are compatible with

Kosnic's emergency module.



IP65



### General Information

|                                |               |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 50°C |
| IP Rating                      | IP65          |
| Nominal Lifetime (h)           | 50,000 h      |
| Protection Rating              | Class III     |
| Installation Area              | Internal      |

### Technical Summary

|                              |                             |
|------------------------------|-----------------------------|
| Product Code                 | FAC8IN26-SCT                |
| Default Power                | 26 W                        |
| Settable Wattages            | 22W, 26W                    |
| Driver Code/Part number      | CYC030SNL60-70N (DR30C6070) |
| Driver Maximum Power (W)     | 30                          |
| Driver Output Current (mA)   | 600/700                     |
| Power Factor                 | 0.92                        |
| Driver Power Factor          | >90                         |
| Default CCT                  | 4,000 K                     |
| Settable Colour Temperatures | 3000k, 4000k, 5000k         |
| SDCM of CCT                  | <6                          |
| CRI                          | >80                         |
| Dimmable                     | Specific Dimmer             |
| Lumens Output Maximum        | 2,000 lm                    |
| Maximum Efficiency           | 82 lm/W                     |
| Nominal Lifetime (h)         | 50,000 h                    |
| Weight                       | 0.79Kg                      |
| Dimensions (L x W x D) (mm)  | 90xØ253                     |
| Cut-Out (mm)                 | Ø215mm                      |



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Faceta



07073 FAC8IN26-SCT

## Overview

The Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 3", 4", 6" and 8" fluorescent downlights with a distinctive faceted white reflector and a recessed light source. Available with a switchable CCT and the downlights are compatible with Kosnic's emergency module.

## Optional Gear

| Product Code | Description   | Type                       |
|--------------|---|----------------------------|
| UEM03        | 3W Universal Emergency Module                           | Emergency Module           |
| UEM03/ST     | 3W Universal Emergency Module, Self Test                | Self-test Emergency Module |
| EMPAD01/ST   | Neka self test 1W universal emergency pad for downlight | Self-test Emergency Module |
| DRC30/DA     | Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver   | Dimmable Driver            |
| EMPAD01      | Neka, 1W universal emergency pad for downlight          | Emergency Module           |

## Accessories



| Product Code | Description   | Type     |
|--------------|---|----------|
| FACAG-OPL    | Faceta, opal frosted diffuser for 8 inch commercial DL  | Diffuser |
| FACAG-CLR    | Faceta, clear frosted diffuser for 8 inch commercial DL | Diffuser |

| Rated Power (W) | Current (mA) | CCT (K) | Lumen (lm) |
|-----------------|--------------|---------|------------|
| 22              | 101          | 3000    | 1700       |
| 22              | 101          | 4000    | 1800       |
| 22              | 101          | 5000    | 1800       |
| 26              | 119          | 3000    | 2000       |
| 26              | 119          | 4000    | 2130       |
| 26              | 119          | 5000    | 2130       |



## General Information

|                                |               |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 50°C |
| IP Rating                      | IP65          |
| Nominal Lifetime (h)           | 50,000 h      |
| Protection Rating              | Class III     |
| Installation Area              | Internal      |

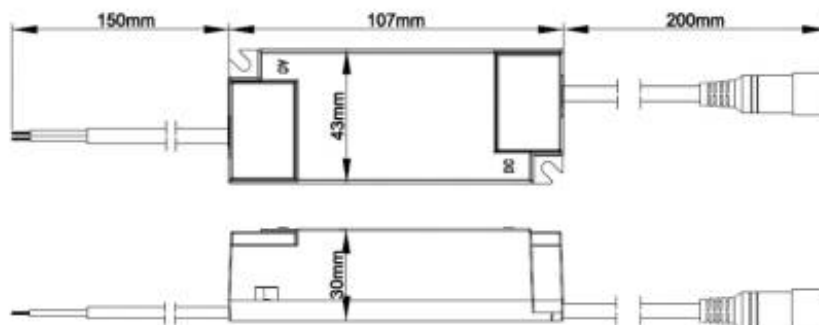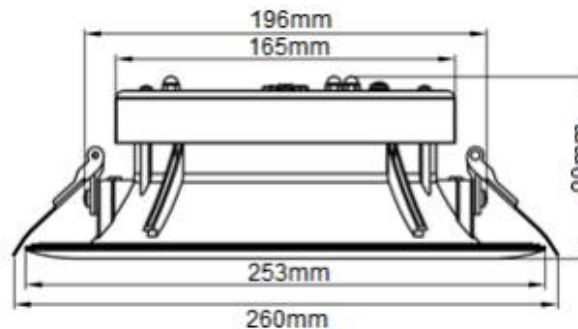

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com