

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Kennet II

07222 KEN24F-SCT

Kennet II, Surface mount batten, CCT switching, 30W, 4ft

- Ideal replacement for twin T8 surface mount battens
- Switchable CCT (3000K/4000K/6000K)
- 20mm conduit entries
- Flicker free
- Plug & play microwave sensor module with corridor function, for standard version only
- Plug & play emergency module
- BESA box fitting points
- Optional DALI 2 and PUSH dimming
- TP(a) rated diffuser



Overview

The Kennet II adds wattage switching to the Kennet range providing even potential for energy savings. The Kennet range is designed to be an excellent replacement for twin T8 surface mount battens. With CCT switching and flicker free output the improvement over fluorescent lights is dramatic, and with the options for



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	KEN24F-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	30 W
Settable Wattages	17W, 22W, 26W, 30W
Driver Code/Part number	Boke BK-PYN042-A0250AY
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 6000k
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,650 lm
Maximum Efficiency	123 lm/W
Emergency Luminous Flux	350 lm
L80B10 Lifetime (h) @Ta 25 °C	60,000 h
Nominal Lifetime (h)	50,000 h
Weight	2.45Kg
Dimensions (L x W x D) (mm)	1178x205x87



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Kennet II



07222 KEN24F-SCT

Overview

The Kennet II adds wattage switching to the Kennet range providing even potential for energy savings. The Kennet range is designed to be an excellent replacement for twin T8 surface mount battens. With CCT switching and flicker free output the improvement over fluorescent lights is dramatic, and with the options for



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Optional Gear

Product Code	Description	Type
BEM203	3W standard UEM for linear LED luminaire	Emergency Module
BEM203/ST	3W self-test UEM for linear LED luminaire	Self-test Emergency Module
MWS-DC	Plug-in microwave motion sensor 12V DC PWM	Microwave Sensor
MWS-DCA	Microwave corridor sensor MC087D RC 12V PWM	Microwave Sensor
BEM303	Batten UEM 3W emergency module for battens	Emergency Module
BEM303/ST	Batten UEM 3W Self test emergency module for battens	Self-test Emergency Module
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor
BEM303/DA	Batten UEM 3W DALI switchable for battens for battens	Emergency Module

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit

Settable (Default in Bold)		Variable		
Rated Power (W)	CCT (K)	Maximum Current Draw (mA)	Total Luminous Flux (lm)	Power Factor
17	3000	85	1910	0.87
17	4000	85	2090	0.87
17	6000	85	1910	0.87
22	3000	110	2390	0.87
22	4000	110	2610	0.87
22	6000	110	2390	0.87
26	3000	126	2870	0.9
26	4000	126	3130	0.9
26	6000	126	2870	0.9
30	3000	140	3350	0.93
30	4000	140	3650	0.93
30	6300	140	3350	0.93



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com


7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Kennet II

07222 KEN24F-SCT

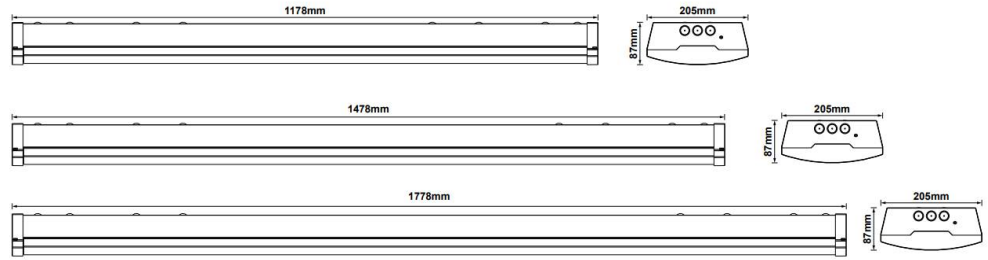

Overview

The Kennet II adds wattage switching to the Kennet range providing even potential for energy savings. The Kennet range is designed to be an excellent replacement for twin T8 surface mount battens. With CCT switching and flicker free output the improvement over fluorescent lights is dramatic, and with the options for



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com