

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

Milo

Kosnic

06512 MIL4F27-W40

## Milo, Edge-lit batten, watt switching 23/27W, 4ft, 4000K

- Designed to replace the popular twin T8 surface modular
- Flicker-free driver as standard
- DALI, 1-10V (0-10V) and PUSH alternative driver available
- Plug & play emergency module
- BESA box fitting points

### Overview

The Kosnic Milo LED battens are replacements for standard ceiling battens. These advanced battens are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being.



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

### Technical Summary

Product Code	MIL4F27-W40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	27 W
Driver Code/Part number	Philips CertaDrive 28W 0.7A 40V 230V I
Driver Maximum Power (W)	28 W
Driver Output Current (mA)	700
Power Factor	>0.94
Driver Power Factor	0.9
Default CCT	4,000 K
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	2,800 lm
Maximum Efficiency	104 lm/W
Emergency Luminous Flux	480 lm
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
Nominal Lifetime (h)	50,000 h
Weight	5.5Kg
Dimensions (L x W x D) (mm)	1255x310x50



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

Milo

Kosnic 

06512 MIL4F27-W40

## Overview

The Kosnic Milo LED battens are replacements for standard ceiling battens. These advanced battens are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises where users require uniform light to maintain well-being.



## General Information


Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

## Optional Gear

Product Code	Description	Type
UEM04/ST	4W Universal Emergency Module Pro Self Test	Self-test Emergency Module
UEM04	4W Universal Emergency Module Pro	Emergency Module
UEM03/ST	3W Universal Emergency Module, Self Test	Self-test Emergency Module
UEM03	3W Universal Emergency Module	Emergency Module
CYC030TDC30-90	30W DALI2 1-10V primary push dim driver (KL30C-PDiiV)	Dimmable Driver
UEM04/DA	4W DALI Universal Emergency Module Pro	Emergency Module
DRC30/DA	Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver	Dimmable Driver

## Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS04	LED Panel & Slim Line II suspension kit (4 cables per bag)	Suspension Kit
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line II (4 cables per bag)	Suspension Kit

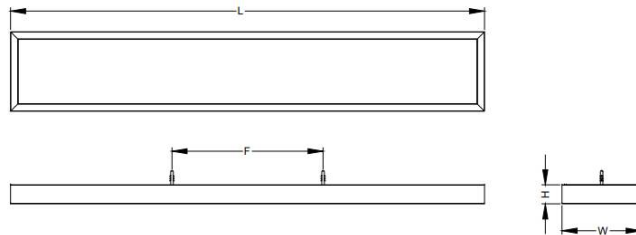

Product Code	Length (mm)	Width (mm)	Height (mm)	Facing (mm)
4F	1255	310	50	800
5F	1555	310	50	800



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com