

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only




# Nachi

07263 NCH5F42-BLK

## Nachi Suspended backlit batten 5ft 42W CCT switch BLK

- Available in black and white suspension kit provided
- The power supply and other built-in components are fixed on the gear tray
- Up and Down luminous function

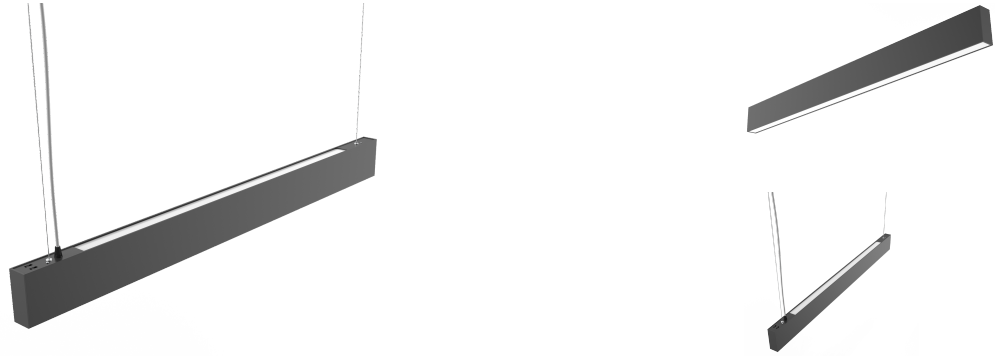

### Overview

The Nachi's ultra slim design features top mounted CCT switches for both the up and down lights, allowing for either to be switched off if desired. Available in both black and white with an optional emergency module the Nachi ultra slim sleek design hold a lot of features.



### General Information

Ambient Temperature Range (°C)	-15°C to 50°C
IK Rating	IK02
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

### Technical Summary

Product Code	NCH5F42-BLK
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	36 W
Power Factor	>0.94
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 6000k
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,450 lm
Maximum Efficiency	96 lm/W
Emergency Luminous Flux	350 lm
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
Nominal Lifetime (h)	50,000 h
Weight	3.25Kg
Dimensions (L x W x D) (mm)	1422x40x100



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

Nachi

Kosnic 

07263 NCH5F42-BLK

Optional Gear

Product Code	Description
NCH-RB-BLK	Nachi Square Metal Box black

Overview

The Nachi's ultra slim design features top mounted CCT switches for both the up and down lights, allowing for ether to be switched off if desired. Available in both black and white with an optional emergency module the Nichi ultra slim sleek design hold a lot of features.

Settable (Default in Bold)		Variable		
CCT (K)	Rated Power (W)	LS Chromaticity Co-Ordinates (X)	LS Chromaticity Co-Ordinates (Y)	LS R9 CRI (LED/OLED)
3000	36	0.441	0.402	5
<b>4000</b>	<b>36</b>	<b>0.379</b>	<b>0.368</b>	<b>10</b>
6000	36	0.325	0.339	0




IP20



General Information

Ambient Temperature Range (°C)	-15°C to 50°C
IK Rating	IK02
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

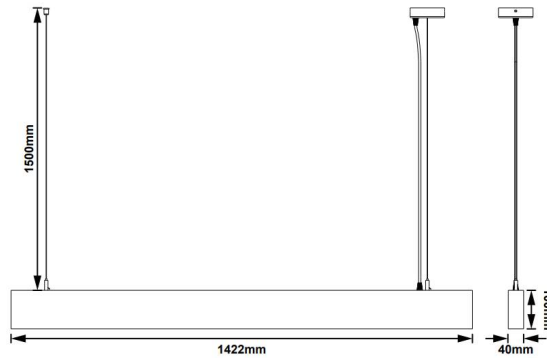

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com