

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Niva III

07438 NIV6FT63

NIVA III interior batten 6ft Twin 35/63W CCT/W switchable


- Switchable CCT (3000K/4000K/6000K)
- High efficiency up to 156lm/W
- Switchable wattage
- Optional plug-in emergency module available
- Optional DALI 2 and PUSH dimming
- For single and twin tube batten replacement
- 20mm Conduit entry
- BESA box fitting points
- Easy installation with press and release end caps to open the cover

Overview

Niva III LED batten utilises high performance LEDs to offer outstanding lumen efficiency. With switchable CCT and are suitable for a wide range of applications including warehouses, factories and garages. The product range also has the option to install an emergency module and microwave sensor.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	NIV6FT63
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	63 W
Settable Wattages	35W, 45W, 53W, 63W
Driver Code/Part number	Philips-CertaDrive
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 6000k
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	9,200 lm
Maximum Efficiency	155 lm/W
Emergency Luminous Flux	500 lm
L80B10 Lifetime (h) @Ta 25 °C	110,000 h
Nominal Lifetime (h)	50,000 h
Weight	2Kg
Dimensions (L x W x D) (mm)	1734x61x71



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Niva III



07438 NIV6FT63

Optional Gear

Product Code	Description	Type
NIV-MWS	NIVA GO plug-in ON/OFF microwave sensor	Microwave Sensor
BEM203	3W standard UEM for linear LED luminaire	Emergency Module
BEM203/ST	3W self-test UEM for linear LED luminaire	Self-test Emergency Module
BEM303	Batten UEM 3W emergency module for battens	Emergency Module
BEM303/ST	Batten UEM 3W Self test emergency module for battens	Self-test Emergency Module
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor
BEM203/DA	Batten UEM DALI-2, 3W emergency module for Kosnic LED batten luminaires	Emergency Module
BEM303/DA	Batten UEM 3W DALI switchable for battens for battens	Emergency Module

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS04	LED Panel & Slim Line II suspension kit (4 cables per bag)	Suspension Kit
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line II (4 cables per bag)	Suspension Kit

Settable (Default in Bold)		Variable		
Rated Power (W)	CCT (K)	Maximum Current Draw (mA)	Total Luminous Flux (lm)	Power Factor
35	3000	164	5000	0.93
35	4000	164	5400	0.93
35	6000	164	5000	0.93
45	3000	206	6300	0.95
45	4000	206	6700	0.95
45	6000	206	6300	0.95
53	3000	243	7400	0.95
53	4000	243	7900	0.95
53	6000	243	7400	0.95
63	3000	288	8400	0.95
63	4000	288	9200	0.95
63	6000	288	8400	0.95

Overview

Niva III LED batten utilises high performance LEDs to offer outstanding lumen efficiency. With switchable CCT and are suitable for a wide range of applications including warehouses, factories and garages. The product range also has the option to install an emergency module and microwave sensor.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com


7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Niva III



07438 NIV6FT63

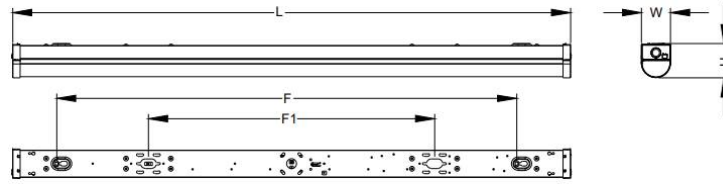

Product Range	Length(mm)	Width(mm)	Height (mm)	Fixing (mm)	Besa Boxes Fixing(mm)
4ft	1170	61	71	965	600
5ft	1470	61	71	1265	600
6ft	1734	61	71	1529	600

Overview

Niva III LED batten utilises high performance LEDs to offer outstanding lumen efficiency. With switchable CCT and are suitable for a wide range of applications including warehouses, factories and garages. The product range also has the option to install an emergency module and microwave sensor.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com