

Nix High Power LED streetlight 80W 4000K Grey

- IP66 & IK08 protection
- Die-cast aluminium housing
- Daylight 4000K colour temperature



Overview

The Nix LED Street Lights offer energy savings and high performance, replacing conventional lighting for roadways, passages, parks and courtyards. With a standard NEMA socket on the top so that photocells meeting the required switching parameters can be fitted. Waterproof rating of IP65 and a robust construction IK09



IP66



General Information

Ambient Temperature Range (°C)	-35°C to 50°C
IK Rating	IK09
IP Rating	IP66
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	External

Technical Summary

Product Code	NIX80-W40-GRY
Input Voltage Supply	100-240Vac 50/60Hz
Default Power	80 W
Power Factor	>0.94
Default CCT	4,000 K
SDCM of CCT	<6
CRI	70
Dimmable	N
Flicker	<1%
Lumens Output Maximum	12,000 lm
Maximum Efficiency	150 lm/W
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
Nominal Lifetime (h)	50,000 h
Weight	7.15Kg
Dimensions (L x W x D) (mm)	711x311x149



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

07196 NIX80-W40-GRY

Optional Gear

Product Code	Description	Type
NIX-DTD	Nix dusk to dawn sensor	Microwave Sensor


Overview

The Nix LED Street Lights offer energy savings and high performance, replacing conventional lighting for roadways, passages, parks and courtyards. With a standard NEMA socket on the top so that photocells meeting the required switching parameters can be fitted. Waterproof rating of IP65 and a robust construction IK09



General Information

Ambient Temperature Range (°C)	-35°C to 50°C
IK Rating	IK09
IP Rating	IP66
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	External

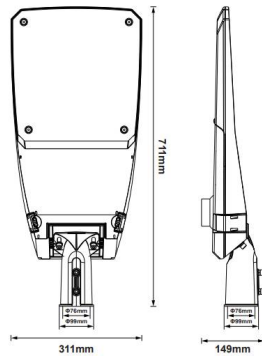

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com