

# Ventas II

05724 VEN20-SCT

## Ventas II IP65 floodlight 20W CCT switch w/remote

- CCT switching with remote control included
- Surge protection
- Diecast aluminium body
- Slim profile
- 1m of H05RN-F 3 x 1mm<sup>2</sup> cable


### Overview

Kosnic Ventas II LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life



**IP65**



### General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Nominal Lifetime (h)	30,000 h
Protection Rating	Class I
Installation Area	External

### Technical Summary

Product Code	VEN20-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	20 W
Power Factor	0.99
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 6500k
CRI	≥82
Dimmable	Specific Dimmer
Lumens Output Maximum	1,680 lm
Maximum Efficiency	84 lm/W
L80B10 Lifetime (h) @Ta 25 °C	36,000 h
Nominal Lifetime (h)	30,000 h
Weight	0.46Kg
Dimensions (L x W x D) (mm)	129x162x31



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

# Ventas II

05724 VEN20-SCT

## Accessories

Product Code	Description	Type
KCWP3IN	IP67 in-line connector	Connector kit
<b>Settable (Default in Bold)</b>	<b>Variable</b>	
<b>CCT (K)</b>	<b>Rated Power (W)</b>	<b>Total Luminous Flux (lm)</b>
3000	20	1410
<b>4000</b>	<b>20</b>	<b>1680</b>
6500	20	1410

## Overview



Kosnic Ventas II LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life




## General Information


Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Nominal Lifetime (h)	30,000 h
Protection Rating	Class I
Installation Area	External

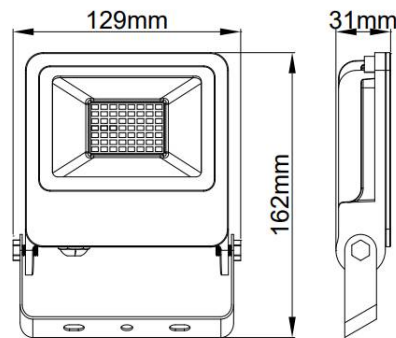


VEN10-SCT



VEN20-SCT



VEN30-SCT

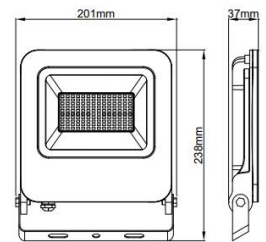

VEN50-SCT



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com