

# Tarkine

06566 TAR10T-BLK

## Tarkine Aluminium diecast tall bollard 10W 4000K black

- Die-cast aluminium body with polycarbonate diffuser
- Black or dark grey textured powder coat finishing
- Options of various heights



### Overview

The Tarkine modern bollards with integrated LEDs are weather resistant and made from die-cast aluminium with a polycarbonate diffuser. Suited for commercial and domestic outdoor illumination of driveways, carparks and other outdoor areas. Available in black or grey with a choice of height.



**IP65**



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	External

### Technical Summary

Product Code	TAR10T-BLK
Input Voltage Supply	110-240Vac 50/60Hz
Default Power	10 W
Default CCT	4,000 K
CRI	≥82
Dimmable	N
Lumens Output Maximum	700 lm
Maximum Efficiency	35 lm/W
L80B10 Lifetime (h) @ Ta 25 °C	54,000 h
Nominal Lifetime (h)	50,000 h
Weight	2.2Kg
Dimensions (L x W x D) (mm)	800xØ220



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713


Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

06566 TAR10T-BLK

## Overview

The Tarkine modern bollards with integrated LEDs are weather resistant and made from die-cast aluminium with a polycarbonate diffuser. Suited for commercial and domestic outdoor illumination of driveways, car parks and other outdoor areas. Available in black or grey with a choice of height.

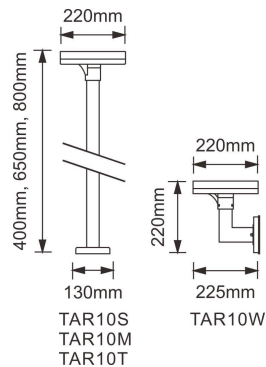

## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	External



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)