


FAIRFIELD Pendant


MLP480ANTBRS Antique Brass

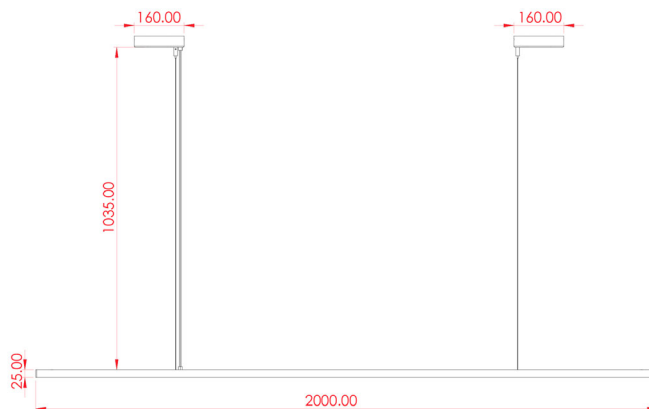

MATERIAL	Brass Aluminium Polycarbonate
HEIGHT	2.5cm 0.98"
WIDTH DIAMETER	240cm 94.49"
LENGTH PROJECTION	n/a
WEIGHT	5.4KG 11.9lbs
LAMP HOLDER	Integrated
MAX WATTAGE	16W x 0
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE CHAIN BAR LENGT	100cm 40"
CABLE TYPE	-

Fixing Bracket MLROSE98 | Antique Brass

* Fixing bracket may differ for UL wired products.

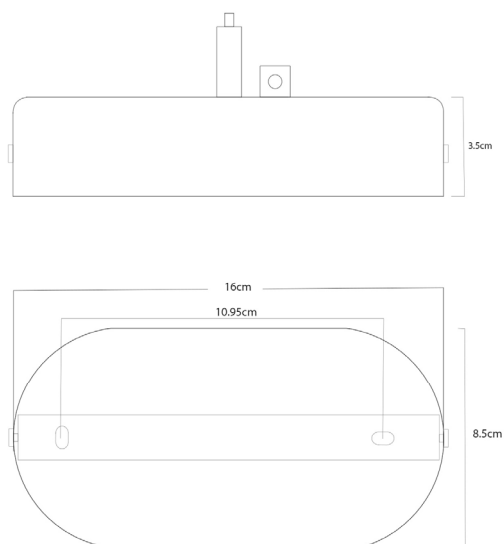


Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

FAIRFIELD Pendant


MLP480ANTSLV Antique Silver

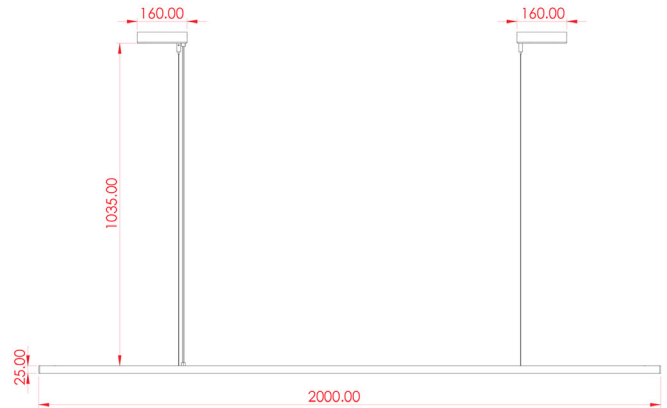

MATERIAL	Brass Aluminium Polycarbonate
HEIGHT	2.5cm 0.98"
WIDTH DIAMETER	240cm 94.49"
LENGTH PROJECTION	n/a
WEIGHT	5.4KG 11.9lbs
LAMP HOLDER	Integrated
MAX WATTAGE	16W x 0
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE CHAIN BAR LENGT	100cm 40"
CABLE TYPE	-

Fixing Bracket MLROSE98 | Antique Silver

* Fixing bracket may differ for UL wired products.

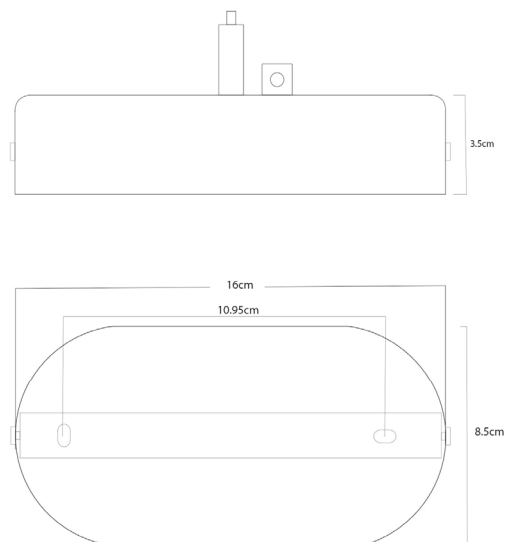


Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.



FAIRFIELD Pendant


MLP480POLBRS Polished Brass

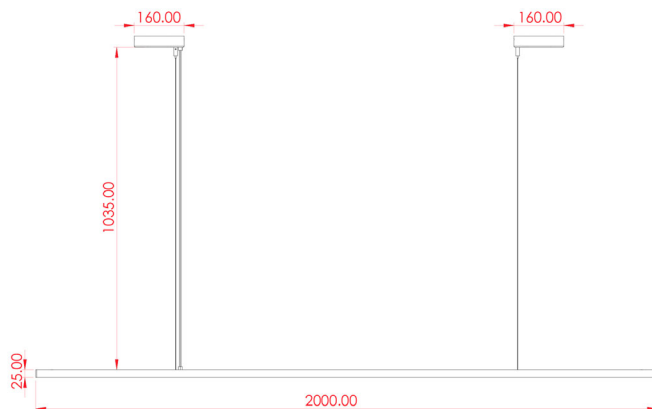

MATERIAL	Brass Aluminium Polycarbonate
HEIGHT	2.5cm 0.98"
WIDTH DIAMETER	240cm 94.49"
LENGTH PROJECTION	n/a
WEIGHT	5.4KG 11.9lbs
LAMP HOLDER	Integrated
MAX WATTAGE	16W x 0
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE CHAIN BAR LENGT	100cm 40"
CABLE TYPE	-

Fixing Bracket MLROSE98 | Polished Brass

* Fixing bracket may differ for UL wired products.

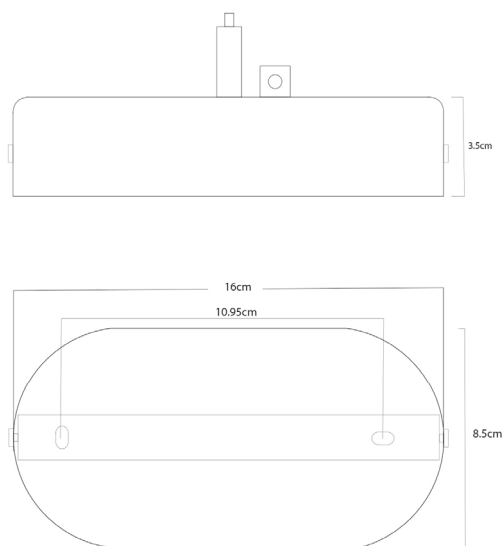

www.mullanlighting.com


Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.




FAIRFIELD Pendant

MLP480SATBRS Satin Brass

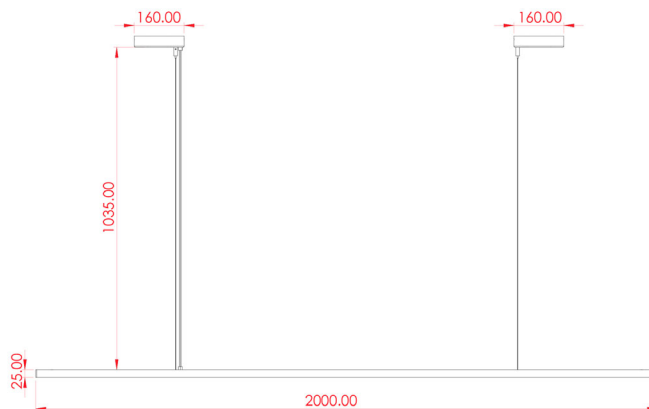

MATERIAL	Brass Aluminium Polycarbonate
HEIGHT	2.5cm 0.98"
WIDTH DIAMETER	240cm 94.49"
LENGTH PROJECTION	n/a
WEIGHT	5.4KG 11.9lbs
LAMP HOLDER	Integrated
MAX WATTAGE	16W x 0
VOLTAGE	220/240v or 110/120v *
IP RATING	20
CLASS PROTECTION	I
SHADE CODE	-
CABLE CHAIN BAR LENGT	100cm 40"
CABLE TYPE	-

Fixing Bracket MLROSE98 | Satin Brass
 * Fixing bracket may differ for UL wired products.

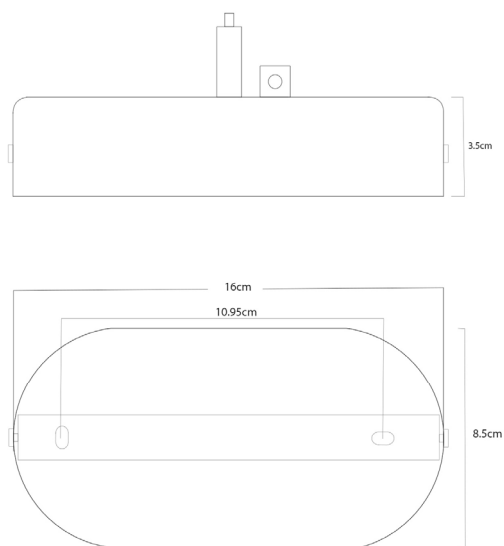

Product Notes:

1) Integrated LED included. 2) Dimensions do not include bulbs. 3) All products are individually made-to-order and therefore may differ slightly within manufacturing tolerances. 4) Cable / chain can be shortened during installation. Longer cable / chain lengths available on request. 5) Additional colour finishes may be available on request. 6) UL wired products operate at 110/120v with the appropriate lamp holder. 7) Twisted cable is not available for UL wired products. Round cable in black or brown only is supplied instead. 8) Refer to our website for a full list of terms and conditions.

