

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Trent III


07837 TRE35F48-SCT

## Trent III 5ft non-corrosive 27-48W CCT/W switchable

- Switchable CCT (3000/4000/6000k)
- High efficiency up to 160lm/W
- 4 Switchable wattages for each model
- Optional plug-in Emergency or ON/OFF sensorDALI
- Durable and rugged IK10 polycarbonate construction
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- Corridor sensor option available
- Suitable for through-wiring
- Opal diffuser

### Overview

Trent III has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.

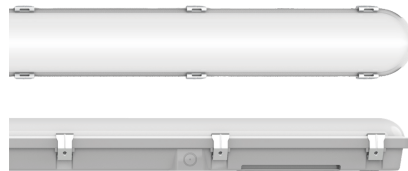

IP65



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

### Technical Summary

Product Code	TRE35F48-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Settable Wattages	27W, 34W, 41W, 48W
Driver Code/Part number	Tridonic LC xxW
Power Factor	0.90
Settable Colour Temperatures	3000k, 4000k, 6000k
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Maximum Efficiency	150 lm/W
Maintained Luminous Flux	350 lm
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
Nominal Lifetime (h)	50,000 h
Weight	1.9Kg
Dimensions (L x W x D) (mm)	1570x99x82



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**7** Years  
Product Warranty  
UK Only

**2** Years  
On-Site Warranty  
Main-land UK Only

# Trent III



07837 TRE35F48-SCT

## Optional Gear

Product Code	Description	Type
BEM303	Batten UEM 3W emergency module for battens	Emergency Module
BEM303/ST	Batten UEM 3W Self test emergency module for battens	Self-test Emergency Module
RMW-AC	Compact Plug in microwave motion & daylight sensor	Microwave Sensor
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor

## Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control

## Overview

Trent III has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.



IP65



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Rated Power (W)	Current (mA)	CCT (k)	Luminous Flux (lm)	Power Factor
27	127.6	3000 Warm White	3800	0.92
27	127.6	4000 Cool White	4000	0.92
27	127.6	6000 Day Light	3800	0.92
34	155.6	3000 Warm White	4800	0.95
34	155.6	4000 Cool White	5100	0.95
34	155.6	6000 Day Light	4800	0.95
41	185.7	3000 Warm White	5500	0.96
41	185.7	4000 Cool White	6000	0.96
41	185.7	6000 Day Light	5500	0.96
48	217.4	3000 Warm White	6300	0.96
48	217.4	4000 Cool White	7000	0.96
48	217.4	6000 Day Light	6300	0.96



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**7** Years  
Product Warranty  
UK Only

**2** Years  
On-Site Warranty  
Main-land UK Only




# Trent III

07837 TRE35F48-SCT



Product Code	Length(mm)
TRE32F18-SCT	668
TRE34F35-SCT	1270
TRE35F48-SCT	1570
TRE36F62-SCT	1870



## Overview

Trent III has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.



**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Optional Sensor Code	RMW-AC (Not suitable for DALI version)
Sensor Type	Microwave
Input Voltage	220-240Vac 50/60Hz
Working Mode	On/Off
HF System	5.8GHz ± 75MHz ISM band / 0.5 mW max
Standby Power	≤0.5 W
Protection	IP20
Transmitting power	≤0.5 mW
Load	400W (Inductive) 800W (resistive) @ 230Vac
Mounting Height	Max 6 m
Detection Area Radius	Max 5 m (100 % / 75 % / 50 % / 25 % settings) (set by DIP switch or remote control)
Detection Angle	150° wall mounting, 360° ceiling mounting
Hold time	5 sec / 1 min / 5 min / 30 min (set by DIP switch or remote control)
Daylight sensor	30 lux / Disabled (set by DIP switch) 30 lux / 100 lux / 300 lux / Disabled (set by remote control)
Override Function	Yes
Corridor Function	No



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com