

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Pollux

07919 PLX16-SCT

## Pollux 16W mains dimmable slim LED wall light CCT switchable

- CCT switchable 3000K/4000k/5000K
- Flicker free
- Up and down luminous function



### Overview

The Pollux slim profile LED wall light offers a low maintenance solution to lighting for all areas, with switchable CCT to meet your different ambient needs.



IP20



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

### Technical Summary

Product Code	PLX16-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	16 W
Power Factor	0.95
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 5000k
SDCM of CCT	<6
CRI	82
Dimmable	Y
Flicker	<1%
Lumens Output Maximum	1,600 lm
Maximum Efficiency	100 lm/W
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
Nominal Lifetime (h)	50,000 h
Weight	0.905Kg
Dimensions (L x W x D) (mm)	360x90x38.5



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Pollux




07919 PLX16-SCT

## Overview

The Pollux slim profile LED wall light offers a low maintenance solution to lighting for all areas, with switchable CCT to meet your different ambient needs.

Power (W)	CCT (K)	Lumen (lm)
16	3000	1540
16	4000	1600
16	5000	1600

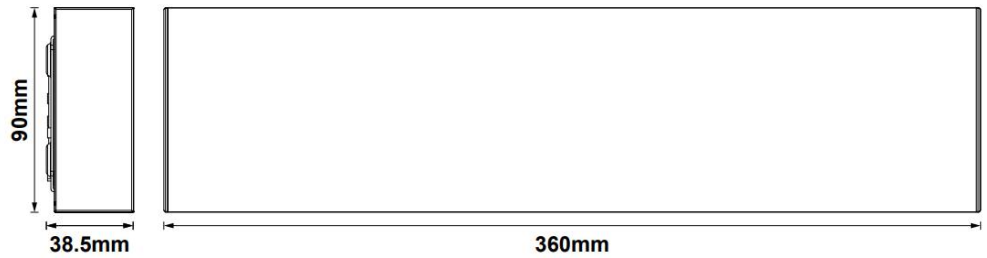

**PLX16-SCT**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)